



Torque wrench service MANOSKOP® (N·m/ft·lb)

730 Quick



Product no. **50184005**
GTIN **4018754268856**
Model **730/5 QUICK**



Label.

Torque wrench service MANOSKOP® 730 Quick 6-50N·m 9 x 12 mm L. 315mm



Product highlights.



Rapid adjustment.


Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of sockets and insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.




2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2


Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.



QuickSelect

Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.

Technical drawing.

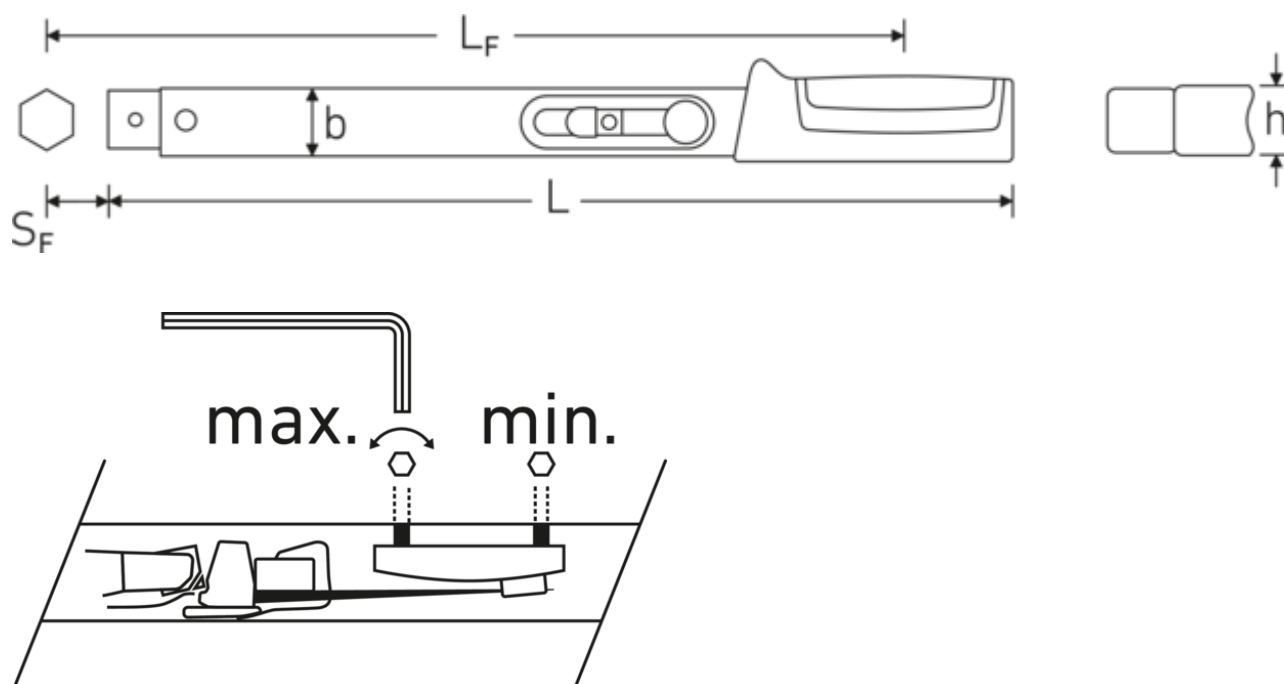

Technical attributes.

Size	5
Anzeigeabweichung	±4 %
Tool holder size [internal square]	9 x 12 mm
Measuring range N·m	6-50 N·m
Measuring range ft·lb	5-36 ft·lb
MA N·m	6 N·m
Nominal value N·m	50 N·m
Scale division N·m	2 N·m
Scale division ft·lb	1 ft·lb
Length mm (L)	315 mm
Width mm (b)	28 mm
Height mm (h)	23 mm
DIN	DIN EN ISO 6789-2:2017
LF	288 mm
SF	17,5 mm


Logistics data.

Product no.	50184005
GTIN	4018754268856
Weight (g)	780 g
Volume (packaged, dm3)	1.073875 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	345
Width mm (IFS)	55
Height mm (IFS)	55
Weight (gross, kg)	0,850
Weight PAP (kg)	0,000
Weight PVC (kg)	0,062
Length (packaged, mm)	355
Width (packaged, mm)	55
Height (packaging, mm)	55

GTIN.



Accessories (for).



58240005
Square drive shell tool



81370002
Plastic box, empty

Images.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal